


## DICHROIC GOLD MR16 Ø51 5000h



- \* Lifetime: 5,000 hours, 4 times more a regular dichroic lamp!
- \* Dichroic coating of the reflector: sends the heat towards the back of the lamp.
- \* Optimization of maintenance scheduling.
- \* For professional and commercial applications.

### Item Characteristics

Code	1D01270L
Lamp Voltage	12 V
Nominal Power	20 W
Base	GU5,3
Lamp Current	1,66 A
Rated Flux	LUMEN
Type of lamp	With safety glass
Colour temperature	3000 K
Lumen	2X18°
Diameter	51 mm
Lenght	45 mm
Colour	


### Performance

ANSI	BAB
Axis cd	460
Alpha	0,29
Photometry	F3
Irc/Ra	100
Lifetime	5000 h

### Tech Info

Dimmerable	YES
Operating Position	360°
UV Stop quartz bulb	YES
Open fittings	YES
Power Factor	1
Fulfilled Directives and norms	EN 60432-3; EN 60357

**Spectrocolorimetry and Photometry**

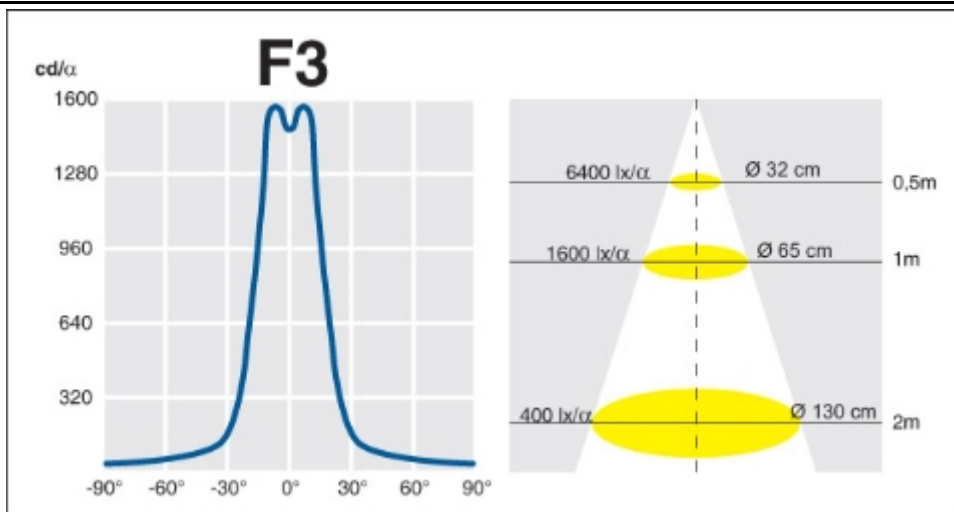

**Shipping info**

Pack	20 pz
Dim.pack height	5 cm
Pack lenght	21 cm
Pack depth	26 cm
Item barcode	8011905040895
Master barcode	8011905732615